

BOBCAT™ 3 WHEEL



**EASY TO
ASSEMBLE AND
DISASSEMBLE
INTO 4 PIECES**



**COMES WITH
LARGE CARRY
BASKET. TILLER
FOLDS DOWN
FOR EASY
STORAGE**

**LIGHTWEIGHT &
EASY TO OPERATE!**

GREAT FOR TRAVEL!

Bobcat™

3 Wheel Compact Scooter

S38600

Red, (Replaces S37601), 1/cs

S38600-POM

Red,
(Comes with "Peace of Mind Service"), 1/cs

NEW!



Red


FEATURES:

- For indoor and outdoor use.
- Allows for 32.2" turning radius.
- Convenient, compact 4 piece design makes tool free assembly and disassembly easy.
- Easy to remove batteries.
- Protected thumb style throttle.
- Comfortable height adjustable seat with flip back, adjustable with arms.
- Comes with anti-tippers.
- Top speed 4 mph. and a cruising range of 7.5 miles.
- Flat free tires.
- Comes with large carry basket.
- Easy to adjust tiller.
- Comes with 2, 12Ah batteries.
- Weight capacity: 250 lbs.

Important Notice: Item numbers that display an asterisk () reflect an item that will be discontinued or package change.

BOBCAT™ 3 WHEEL

PARTS DIAGRAM

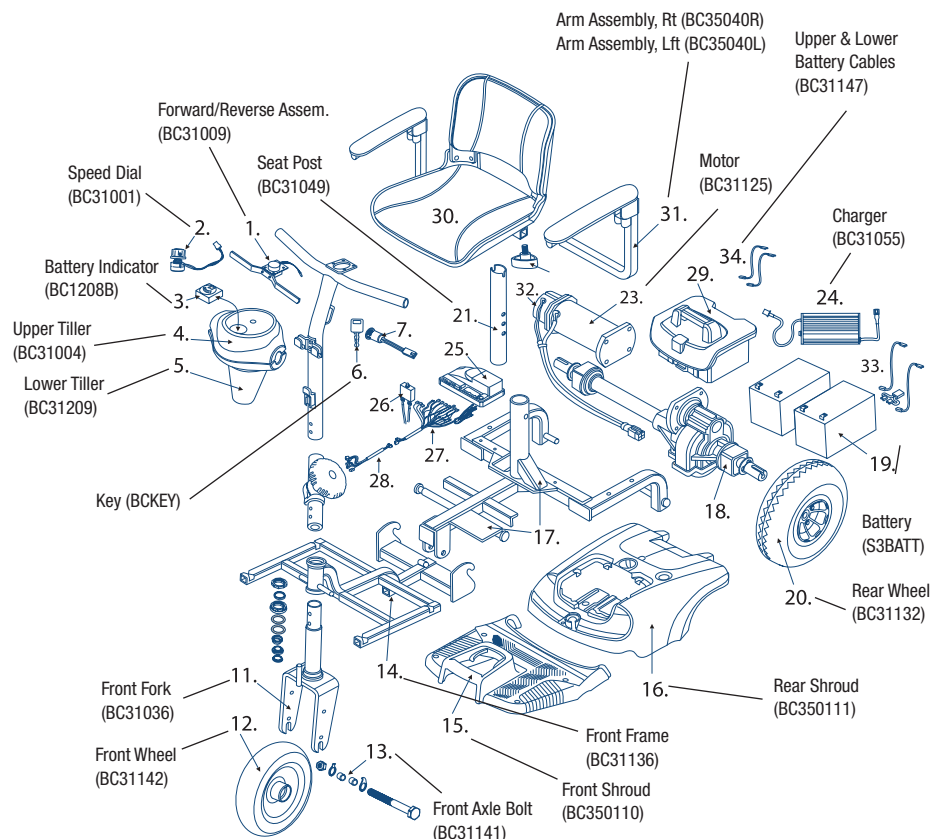

- | | |
|------------------------------|---------|
| 7. Key Switch | BC1006 |
| 17. Rear Frame | BC31135 |
| 18. Transaxle w/o Motor | |
| 25. Controller | BC31008 |
| 26. Circuit Breaker | BC20ABC |
| 27. Front Wire Harness | BC31048 |
| 28. Rear Wire Harness | BC31058 |
| 29. Battery Case w/Batteries | BC31133 |
| Case Only | BC31140 |
| 33. Battery Harness w/Jumper | BC31068 |

Product diagrams are for illustrative purposes only. Please confirm the correct parts needed prior to ordering by checking the product diagram online at: drivemedical.com or by contacting our Technical Service Team at techsupport@drivemedical.com

SPECIFICATIONS

ITEM #	S38600
DIMENSION (L X W X H)	38" X 19" X 38.5"
BASE WEIGHT (WITHOUT BATTERY)	55 LBS.
BATTERY WEIGHT	22 LBS.
SEAT WEIGHT	11 LBS.
TOTAL WEIGHT	88 LBS.
BATTERY	12 AH/12V X 2
CHARGER	1.5A OFF-BOARD
CHARGING TIME, HOURS	>8H
FRONT WHEEL	8" X 2"
REAR WHEEL	8" X 2"
ANTI-TIP WHEEL	2"
DRIVING SYSTEM	DIRECT REAR WHEELS (WITH DIFFERENTIAL GEAR)
BRAKE SYSTEM	ELECTROMAGNETIC BRAKE
CONTROL METHOD	BY SPEED CONTROL LEVER
TOP SPEED	4 MPH
TURNING RADIUS	32.2"
CLIMBING ANGLE	6~8°
CRUISING RANGE	6~7.5 MILES
WEIGHT CAPACITY	250 LBS.
WARRANTY	LIFETIME ON FRAME, ONE YEAR ON ELECTRONIC CONTROLLER AND DRIVE TRAIN COMPONENTS, SIX MONTHS ON BATTERY

powered mobility

To order call toll free: 877.224.0946

drive™